



Continental Steel and Tube Company

P.O. BOX 030040

Fort Lauderdale, FL, 33303

Phone: 954.332.2290

Fax: 954.332.2296

Email: Sales@ContinentalSteel.com

Website: www.continentalsteel.com

Copper Sheet - Cold Rolled

Made in a variety of widths, gauges and tempers - for stamping, deep drawing, forming, spinning and spring applications. Precise control of grain structure means economy in fabrication, with excellent finish and quality.

Electrolytic Tough Pitch

Specifications:


CDA 110 ASTM B152

AMS 4500

UNS C11000

Nominal Composition:

Copper: 99.9%

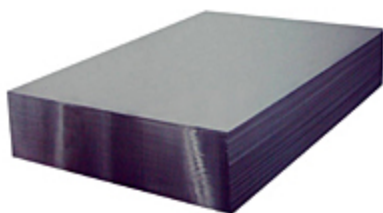

1 2

Item #	Thickness	Sheet Size	Sheet Weight per Unit Area	Weight per Sheet
<u>CS-0135-36-96</u>	0.0135 inches 0.3429 mm	36 x 96 inches	10.00 lbs/ft ² 48.82 kg/m ²	15.07 lbs 6.834245 kg
<u>CS-0189-36-96</u>	0.0189 inches 0.48006 mm	36 x 96 inches	14 lbs/ft ² 68.348 kg/m ²	21.10 lbs 9.56885 kg
<u>CS-0216-20-96</u>	0.0216 inches 0.54864 mm	20 x 96 inches	16 lbs/ft ² 78.112 kg/m ²	13.40 lbs 6.0769 kg

Item #	Thickness	Sheet Size	Sheet Weight per Unit Area	Weight per Sheet
<u>CS-0216-24-96</u>	0.0216 inches 0.54864 mm	24 x 96 inches	16 lbs/ft ² 78.112 kg/m ²	16.07 lbs 7.287745 kg
<u>CS-0216-24-120</u>	0.0216 inches 0.54864 mm	24 x 120 inches	16 lbs/ft ² 78.112 kg/m ²	20.09 lbs 9.110815 kg
<u>CS-0216-30-96</u>	0.0216 inches 0.54864 mm	30 x 96 inches	16 lbs/ft ² 78.112 kg/m ²	20.09 lbs 9.110815 kg
<u>CS-0216-30-120</u>	0.0216 inches 0.54864 mm	30 x 120 inches	16 lbs/ft ² 78.112 kg/m ²	25.12 lbs 11.39192 kg
<u>CS-0216-36-96</u>	0.0216 inches 0.54864 mm	36 x 96 inches	16 lbs/ft ² 78.112 kg/m ²	24.11 lbs 10.933885 kg
<u>CS-0216-36-120</u>	0.0216 inches 0.54864 mm	36 x 120 inches	16 lbs/ft ² 78.112 kg/m ²	30.14 lbs 13.66849 kg
<u>CS-0243-36-96</u>	0.0243 inches 0.61722 mm	36 x 96 inches	18 lbs/ft ² 87.876 kg/m ²	27.13 lbs 12.303455 kg
<u>CS-0243-36-120</u>	0.0243 inches 0.61722 mm	36 x 120 inches	18 lbs/ft ² 87.876 kg/m ²	33.91 lbs 15.378185 kg
<u>CS-0250-12-96</u>	0.025 inches 0.6350 mm	12 x 96 inches	18 lbs/ft ² 87.876 kg/m ²	9.30 lbs 4.21755 kg
<u>CS-0270-24-96</u>	0.027 inches 0.6858 mm	24 x 96 inches	20 lbs/ft ² 97.64 kg/m ²	20.09 lbs 9.110815 kg
<u>CS-0270-24-120</u>	0.027 inches 0.6858 mm	24 x 120 inches	20 lbs/ft ² 97.64 kg/m ²	25.12 lbs 11.39192 kg
<u>CS-0270-30-96</u>	0.027 inches 0.6858 mm	30 x 96 inches	20 lbs/ft ² 97.64 kg/m ²	25.12 lbs 11.39192 kg
<u>CS-0270-30-120</u>	0.027 inches 0.6858 mm	30 x 120 inches	20 lbs/ft ² 97.64 kg/m ²	31.40 lbs 14.2399 kg
<u>CS-0270-36-96</u>	0.027 inches 0.6858 mm	36 x 96 inches	20 lbs/ft ² 97.64 kg/m ²	30.14 lbs 13.66849 kg
<u>CS-0270-36-120</u>	0.027 inches 0.6858 mm	36 x 120 inches	20 lbs/ft ² 97.64 kg/m ²	37.67 lbs 17.083345 kg

Item #	Thickness	Sheet Size	Sheet Weight per Unit Area	Weight per Sheet
<u>CS-0323-12-96</u>	0.0323 inches 0.82042 mm	12 x 96 inches	24 lbs/ft ² 117.168 kg/m ²	12.02 lbs 5.45107 kg
<u>CS-0323-24-96</u>	0.0323 inches 0.82042 mm	24 x 96 inches	24 lbs/ft ² 117.168 kg/m ²	24.04 lbs 10.90214 kg
<u>CS-0323-30-96</u>	0.0323 inches 0.82042 mm	30 x 96 inches	24 lbs/ft ² 117.168 kg/m ²	30.05 lbs 13.627675 kg
<u>CS-0323-36-96</u>	0.0323 inches 0.82042 mm	36 x 96 inches	24 lbs/ft ² 117.168 kg/m ²	36.06 lbs 16.35321 kg
<u>CS-0323-36-120</u>	0.0323 inches 0.82042 mm	36 x 120 inches	24 lbs/ft ² 117.168 kg/m ²	45.07 lbs 20.439245 kg
<u>CS-0431-12-96</u>	0.0431 inches 1.09474 mm	12 x 96 inches	32 lbs/ft ² 156.224 kg/m ²	16.14 lbs 7.31949 kg